


580 019

SAE 30R7 HOSE

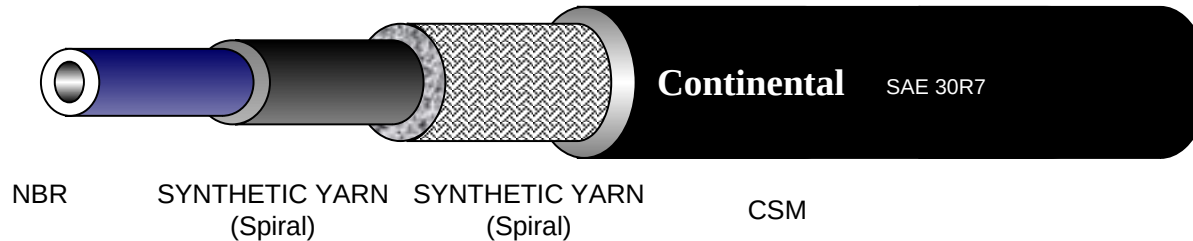

This hose meets or exceeds SAE 30R7 specifications. It can be used for vacuum lines, emission/vapor, oil vent, diesel and up to B20 Biodiesel fuel lines, oil return and even as a coolant hose for return/overflow tanks. Hysunite® hose cover is oil and fuel resistant and withstands exposure to fuel, vapor, moisture and high heat up to 257°F. The Chemigum® rubber tube is specially compounded to resist gasoline, oil, diesel and other fuels. High strength synthetic textile reinforcement offers a minimum burst of 175 PSI. *Warning: not recommended for use as fuel injection hose and it is not EPA or CARB Certified for Low Permeation gasoline fuel line applications and should not be used for such applications.*

SIZE	INSIDE DIAMETER				OUTSIDE DIAMETER				WEIGHT		MIN BURST	
	INCH		mm		INCH		mm					
INCH	min	max	min	max	min	max	min	max	lbs/ft	kg/m	psi	BAR
1/8	0.110	0.142	2.80	3.60	0.323	0.354	8.20	9.00	0.04	0.07	250	17.2
5/32	0.141	0.172	3.57	4.37	0.337	0.382	8.55	9.71	0.05	0.08	250	17.2
3/16	0.172	0.204	4.37	5.18	0.383	0.429	9.73	10.90	0.06	0.09	250	17.2
1/4	0.234	0.266	5.94	6.76	0.477	0.523	12.12	13.28	0.09	0.14	250	17.2
5/16	0.296	0.328	7.54	8.34	0.539	0.585	13.71	14.87	0.11	0.16	250	17.2
3/8	0.359	0.391	9.12	9.93	0.602	0.648	15.30	16.46	0.12	0.19	250	17.2
7/16	0.413	0.460	10.50	11.70	0.689	0.736	17.50	18.70	0.16	0.24	175	12.1
1/2	0.477	0.523	12.12	13.28	0.750	0.812	19.05	20.62	0.18	0.26	175	12.1
5/8	0.594	0.656	15.09	16.67	0.907	0.969	23.02	24.60	0.24	0.35	175	12.1
3/4	0.719	0.781	18.26	19.84	1.094	1.156	27.79	29.36	0.34	0.51	175	12.1